


Illus Illumination

Project Range

2024 Catalogue



**BEYOND LIGHT.
TO THE LAST DETAILS!**



We strive to be
the leader in the industry
and the world's most
respected lighting solution
provider.


ILLUS Lighting

ILLUS dedicates itself to provide human oriented architectural lighting solution and products for indoor and outdoor applications. A truly innovative company, ILLUS has always been at the forefront of professional office lighting since inception. Since then ILLUS continues developing innovative, custom lighting solutions that meet extremely exacting requirements in terms of ergonomics, economic efficiency and environmental compatibility and also deliver aesthetic added value to our customers. Our customers will always find that our solutions reflect the requirements satisfying a broad range of customer needs for every lighting application ILLUS is a brand that helps revealing the beauty around you where it constitutes of products and solutions designed with care and attention to detail giving professional quality products.

Our goal has always been to offer our customers a first-class product backed by unparalleled service, focused on solving our clients' illumination challenges.

Our Vision

In ILLUS every detail created with enthusiasm constantly evolving technology to simplify the life of people. We consistently innovate and devote to decrease power consumption to ease the burden of earth. Light is essential for people's life quality and wellbeing, we care for every situation people need artificial light whenever light serves. ILLUS lighting is beyond light, to the last details.

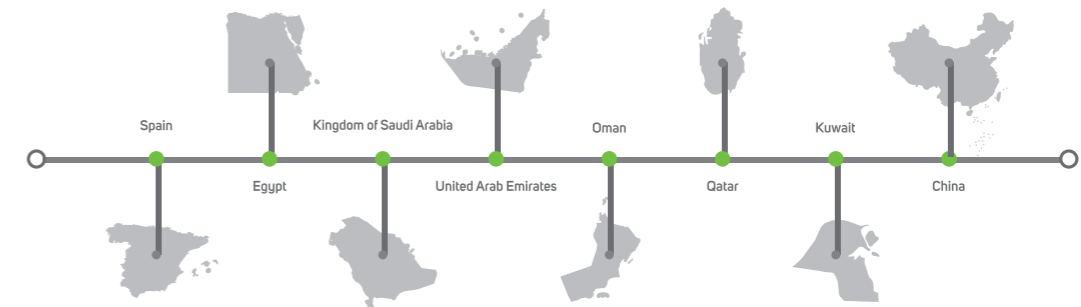

Where to find us

Kingdom of Saudi Arabia-Head Office

📍 3533 Al Kharj Rd, Al Aziziyah, Riyadh 14511
<https://maps.app.goo.gl/TRgDmL4efaDRzWWL8>

China – illus

📍 Star Alliance, No.68 Zhongxing Avenue, Guzhen, Zhongshan,Guangdong, China
<https://maps.app.goo.gl/cJJefWvYRyfzAQjq8>

Spain – illus

📍 46970 Alaquàs, Valencia, Spain
<https://goo.gl/maps/C5DejH52sP17L2Nv9>

UAE – Build Station

📍 75 6th St - Al Quoz - Dubai - United Arab Emirates
<https://goo.gl/maps/LCTSSYSqEB2mcAbA8>

Qatar – Build Station

📍 Zone 43, Street 340, Salwa Rd, Doha, Qatar
<https://maps.app.goo.gl/hQY8PbFDPbXKYiqJ6>

Oman – Build Station

📍 18 November Street 411 Muscat, Al Aziba, 130, Oman
<https://goo.gl/maps/6tJLBVdhiVPvUE1w7>

Kuwait –Lighting Stores

📍 No 4, Opposite the city center entrance, 142 8 St, Shuwaikh Industrial, Kuwait
Lighting Stores - Google Maps

Egypt -illus


📍 13 El Obour Blgds. Salah Salem – Masr El-Gedida - Cairo
30° 04'40.0"N 31° 18'36.7"E - Google Maps



R&D and Manufacturing

Manufacturing

ILLUS has two directly-operated production bases in Yangzhou covering an area of 25,000 square meters and 300 staffs. The production bases contain over 30 hi-speed automatic encapsulation lines, 15 automatic SMD and applied welding lines, 5 automatic extrusion lines and 6 automatic luminaire production lines, characterizing a complete production process for LED strip inclusive of LED encapsulation, hi-speed SMT, automatic welding and full series of water resistance with average monthly production capacity of LED strips reaching up to 1.5 million meters. Besides, ILLUS modernized manufacturing factory to achieve a complete production process for linear luminaire inclusive of precision machining, automatic assembly, color spraying and free customization with average monthly production capacity reaching up to 120,000 strips in order to assure customers of high-quality, super cost-effective products and rapid delivery.

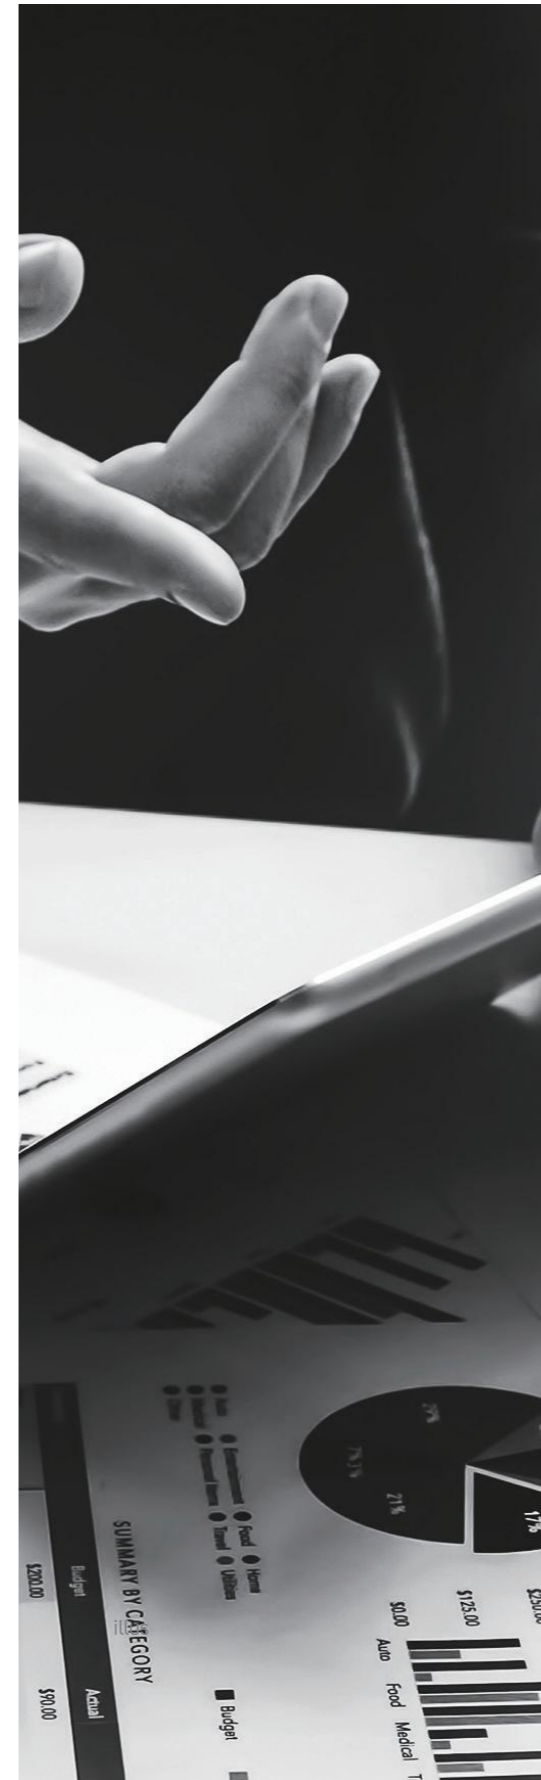

R&D

ILLUS has established a R&D expert team composed of over 50 core technicians, a majority of which graduated from top-rated universities and are proficient in such fields as optics, technique, material science, electrics, thermal physics, intelligent control and industrial design with more than 10 years R&D experience and technical know-how in linear lighting.



Laboratory & Inspection

Laboratory of ILLUS, covering an area of 460 square meters, was outfitted with 48 sets of equipment which was distributed as per safety zone, EMC zone, photoelectric zone, IP water resistance zone, aging zone and product reliability zone. Inspection covers products inclusive of LED strip, neon strip, linear luminaire, power supply and related accessories, with inspection standard ranging from safety, EMC, performance to product reliability. Testing reports can be tracked all the way from product design evaluation period to type approval period to guarantee quality of products.



Patent

ILLUS strives to R&D in product and technology. So far, it has gained 3 invention patents and nearly 100 utility model patents and appearance patents.

Contents

Project Range

■ LED Flat Luminaire	2-3
■ LED High Bay Luminaire	4-7
■ LED High Power Lamp	8-9
■ LED Flood Luminaire	10-13
■ SolarLED Street Light Luminaire	14-17
■ LED Waterproof Batten Luminaire	18-20
■ Water Proof Batten Luminaire	21-22
■ LED Wall Grazer	24-25
■ LED Flexible Linear Light (Wall Washer)	26-27
■ Waterproof Connector	28-33
■ Sensor	34-37
■ LED Emergency Light	38-40
■ LED Swimming Pool Light	41-46



Project Range

- LED Flat Luminaire
- LED High Bay Luminaire
- LED High Power Lamp
- LED Flood Luminaire
- SolarLED Street Light Luminaire
- LED Waterproof Batten Luminaire
- Water Proof Batten Luminaire
- LED Wall Grazer
- LED Flexible Linear Light (Wall Washer)
- Waterproof Connector
- Sensor
- LED Emergency Light
- LED Swimming Pool Light





LED Flat Luminaire

LED Panel

Technical Operating & Electrical Data

Input Voltage & Frequency	AC100-277V, 50/60Hz
Rated CRI	92
Beam Angle	120°
Dimming	Non-Dimmable
IP Rating	IP20
Body Material	Aluminum
Life Span	50000h

Areas of Application

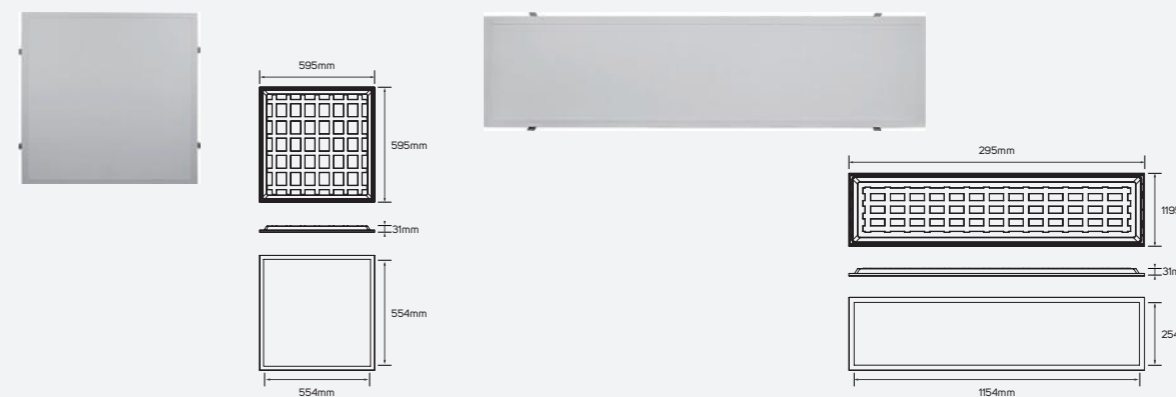

Accessories Specifications



Family Product List

Code No.	Power	CCT	Lumen	
612651	40W	3000K	4200lm	■ Aluminum
612652	40W	4000K	4300lm	
612653	40W	5700K	4400lm	
612654	40W	3000K	3100lm	
612655	40W	4000K	3150lm	IP 20,40 CRI 92 120°
612656	40W	5700K	3200lm	AC220-240V 50,000h





LED High Bay Luminaire

High Bay

Technical Operating & Electrical Data

Input Voltage & Frequency	AC100-240V, 50/60Hz
Rated CRI	80
Beam Angle	125°
Dimming	Non-Dimmable
IP Rating	IP20
Body Material	Plastic
Life Span	30000h

Areas of Application

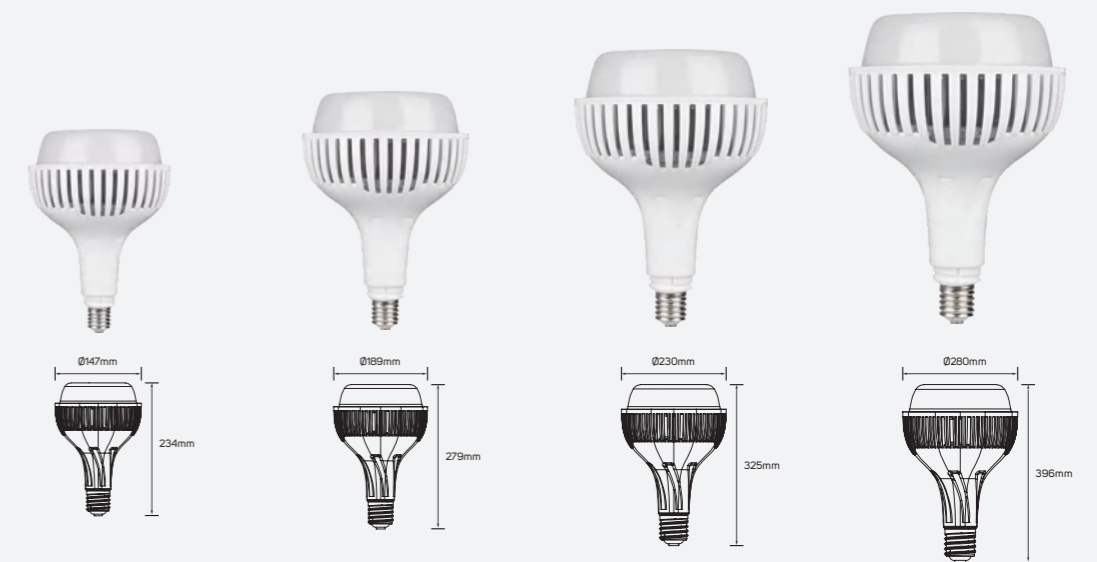

Accessories Specifications



612657

Family Product List



Code No.	Power	CCT	Lumen	Code No.	Power	CCT	Lumen
611219	40W	3000K	3400lm	611726	115W	3000K	12100lm
611722	40W	4000K	3650lm	611725	115W	4000K	12600lm
611218	40W	6500K	3700lm	611724	115W	6500K	12800lm
611221	80W	3000K	6600lm	611729	155W	3000K	15700lm
611723	80W	4000K	7150lm	611728	155W	4000K	16300lm
611220	80W	6500K	7200lm	611727	155W	6500K	16600lm

■ Plastic

IP 20 CRI 80 125°
AC100-240V 30,000h


High Bay

Areas of Application

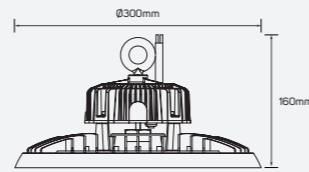


Accessories Specifications


Reflector

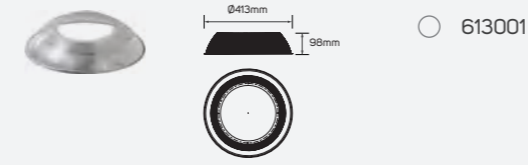


Reflector

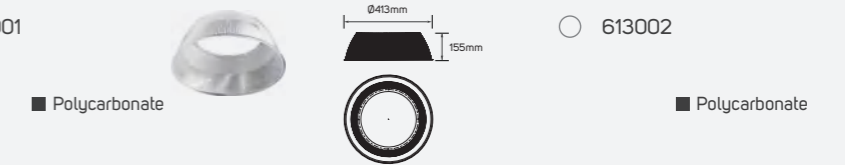

Bracket

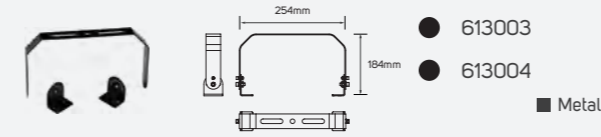


Suspension Kit

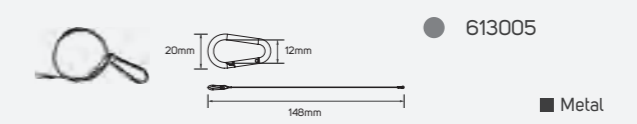

Accessories Specifications


Frame

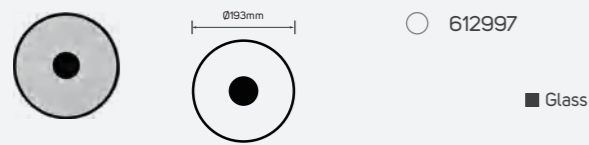


Frame



Reflector

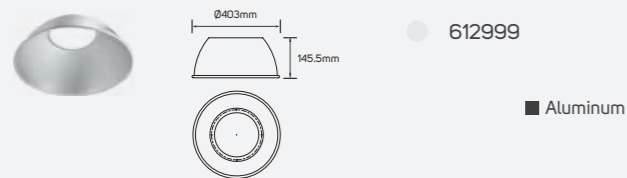

Reflector

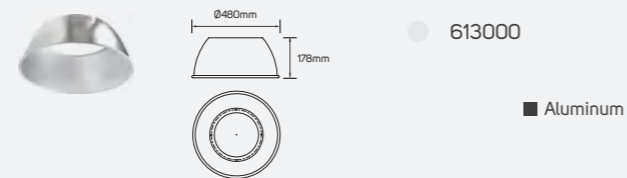


Family Product List

Code No.	Power	CCT	Lumen	Beam Angle	Material
612988	100W	3000K	11000lm	110°	Aluminum
612989	100W	4000K	12000lm		
612990	100W	5700K	13000lm		
612991	145W	3000K	16000lm	110°	Aluminum
612992	145W	4000K	18000lm		
612993	145W	5700K	19000lm		
612994	195W	3000K	22000lm		
612995	195W	4000K	24000lm		
612996	195W	5700K	25500lm		
613351	200W	4000K	32500lm	90°	IP 65 AC100-277V 52,000h


High Bay

Areas of Application



Accessories Specifications

Hook

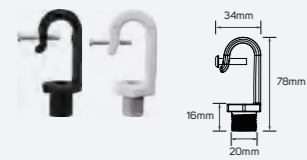

- 614413
- 614414
- Aluminum

Tube



- 614415
- 614417
- Iron

Tube



- 614416
- 614418
- Iron

Reflector



- 614419
- 614421
- Aluminum

Reflector



- 614420
- 614422
- Aluminum

Family Product List

Code No.	Power	CCT	
● 614409	100W	11000@3000K	■ Aluminum+Plastic
● 614410	150W	16500@3000K	
● 614411	100W	11000@3000K	IP 20
● 614412	150W	16500@3000K	AC100-240V
			120°
			50,000h







LED Flood Luminaire

Stander

Areas of Application

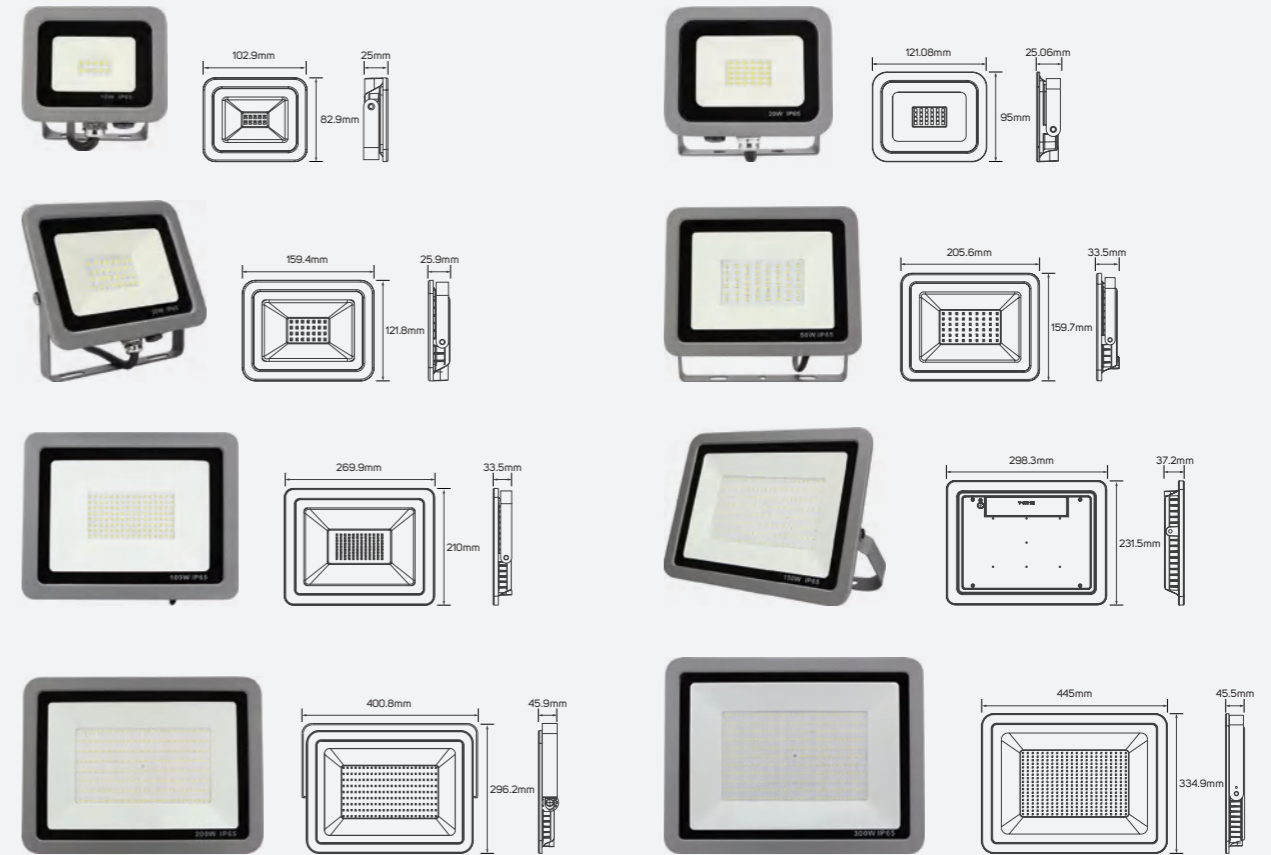

Family Product List

Code No.	Power	CCT	Lumen	Code No.	Power	CCT	Lumen
● 611637	10W	3000K	800lm	● 611649	100W	3000K	8000lm
● 611638	10W	4000K	800lm	● 611650	100W	4000K	8000lm
● 611639	10W	5700K	800lm	● 611651	100W	5700K	8000lm
● 611640	20W	3000K	1600lm	● 611652	150W	3000K	12000lm
● 611641	20W	4000K	1600lm	● 611653	150W	4000K	12000lm
● 611642	20W	5700K	1600lm	● 611654	150W	5700K	12000lm
● 611643	30W	3000K	2400lm	● 611655	200W	3000K	16000lm
● 611644	30W	4000K	2400lm	● 611656	200W	4000K	16000lm
● 611645	30W	5700K	2400lm	● 611657	200W	5700K	16000lm
● 611646	50W	3000K	4000lm	● 611658	300W	3000K	24000lm
● 611647	50W	4000K	4000lm	● 611659	300W	4000K	24000lm
● 611648	50W	5700K	4000lm	● 611660	300W	5700K	24000lm

■ Aluminum

IP 65 CRI 80 120°
AC220-240V 35,000h

Motion Sensor




● 612512

■ Aluminum+Plastic

LED Flood Luminaire

Stander

Areas of Application



Family Product List

Code No.	Power	CCT	Lumen	Code No.	Power	CCT	Lumen
● 611661	20W	3000K	1600lm	● 611673	100W	3000K	8000lm
● 611662	20W	4000K	1600lm	● 611674	100W	4000K	8000lm
● 611663	20W	5700K	1600lm	● 611675	100W	5700K	8000lm
● 611664	30W	3000K	2400lm	● 611676	150W	3000K	12000lm
● 611665	30W	4000K	2400lm	● 611677	150W	4000K	12000lm
● 611666	30W	5700K	2400lm	● 611678	150W	5700K	12000lm
● 611667	50W	3000K	4000lm	● 611679	200W	3000K	16000lm
● 611668	50W	4000K	4000lm	● 611680	200W	4000K	16000lm
● 611669	50W	5700K	4000lm	● 611681	200W	5700K	16000lm
● 611670	70W	3000K	5600lm				
● 611671	70W	4000K	5600lm				
● 611672	70W	5700K	5600lm				

■ Aluminum

IP 65 CRI 80 120°
AC220-240V 35,000h

Motion Sensor




● 612512

■ Aluminum+Plastic

LED Flood Luminaire

Stander

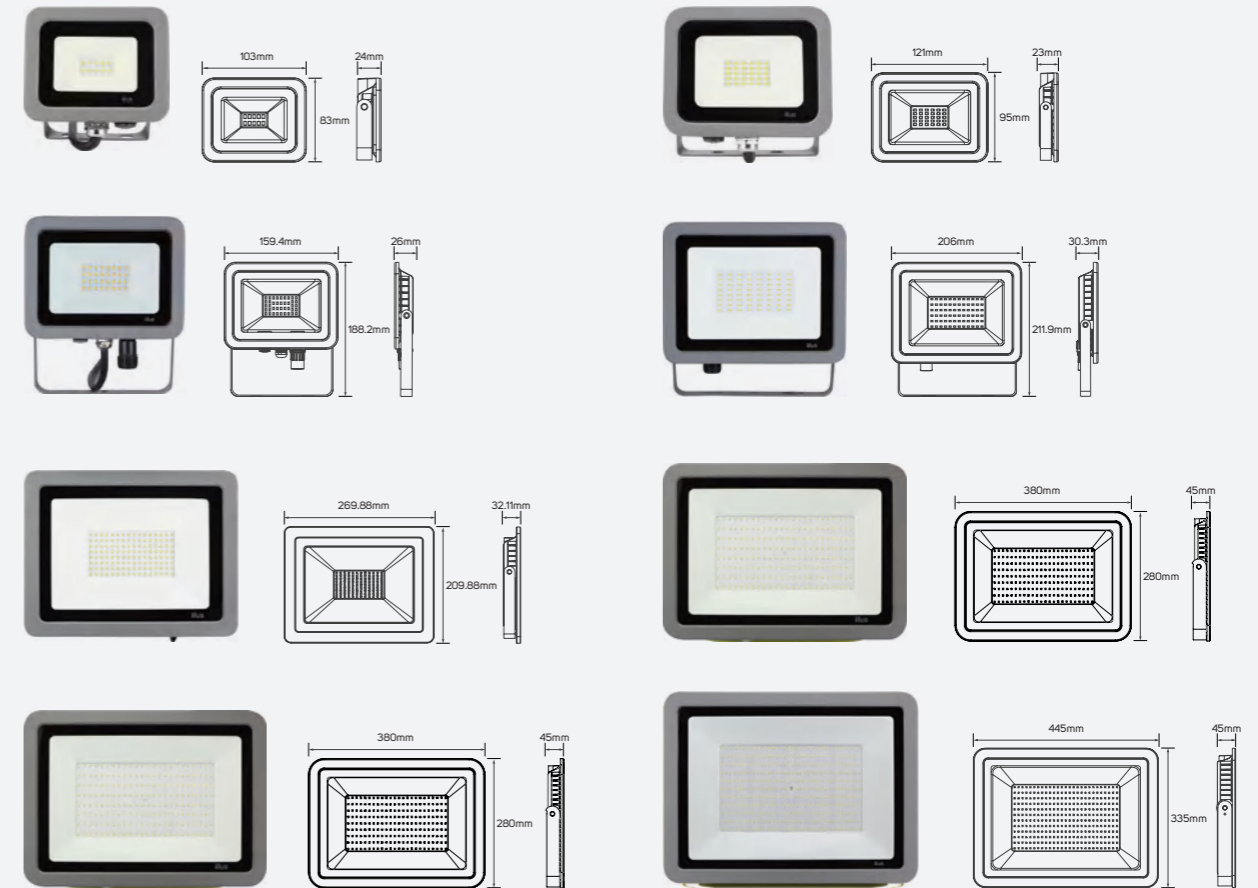

Family Product List

Code No.	Power	CCT	Lumen	Code No.	Power	CCT	Lumen
● 612391	10W	3000K	960lm	● 612403	100W	3000K	9400lm
● 612392	10W	4000K	990lm	● 612404	100W	4000K	9600lm
● 612393	10W	5700K	1000lm	● 612405	100W	5700K	9700lm
● 612394	20W	3000K	1900lm	● 612406	150W	3000K	14500lm
● 612395	20W	4000K	1980lm	● 612407	150W	4000K	14800lm
● 612396	20W	5700K	2000lm	● 612408	150W	5700K	15000lm
● 612397	30W	3000K	2700lm	● 612409	200W	3000K	18500lm
● 612398	30W	4000K	3000lm	● 612410	200W	4000K	19300lm
● 612399	30W	5700K	3500lm	● 612411	200W	5700K	19500lm
● 612400	50W	3000K	4850lm	● 612412	300W	3000K	28500lm
● 612401	50W	4000K	4950lm	● 612413	300W	4000K	29500lm
● 612402	50W	5700K	5000lm	● 612414	300W	5700K	30000lm

■ Aluminum

IP 65 CRI 80 110°
AC220-240V 30,000h

Motion Sensor



● 612512

■ Aluminum+Plastic



SolarLED Street Light Luminaire

Street Light



Family Product List

Code No.	Power	CCT	Lumen
613152	4.5W	3000K	1070lm
613153	4.5W	4000K	1090lm
613154	4.5W	6000K	1120lm
613155	6.5W	3000K	1570lm
613156	6.5W	4000K	1600lm
613157	6.5W	6000K	1640lm

■ Aluminum+Silicon

IP 65 CRI 80 \angle 100°
 AC220-240V 30,000h



Street Light




Family Product List

Code No.	Power	CCT	Lumen	Code No.	Power	CCT	Lumen
● 612839	50W	3000K	5400lm	● 612845	145W	3000K	15600lm
● 612840	50W	4000K	5450lm	● 612846	145W	4000K	15750lm
● 612841	50W	6000K	5550lm	● 612847	145W	6000K	15950lm
● 612842	100W	3000K	9700lm	● 612848	200W	3000K	20200lm
● 612843	100W	4000K	9800lm	● 612849	200W	4000K	22200lm
● 612844	100W	6000K	9950lm	● 612850	200W	6000K	22450lm

■ Aluminum+Silicon

IP 66 CRI 80 100°
AC100-277V 50,000h

Plug

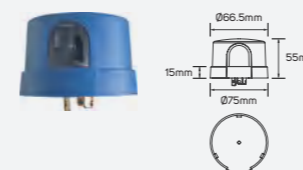


● 612851

■ Aluminum+Plastic



LED Water Proof Batten Luminaire

LED Waterproof Batten Luminaire

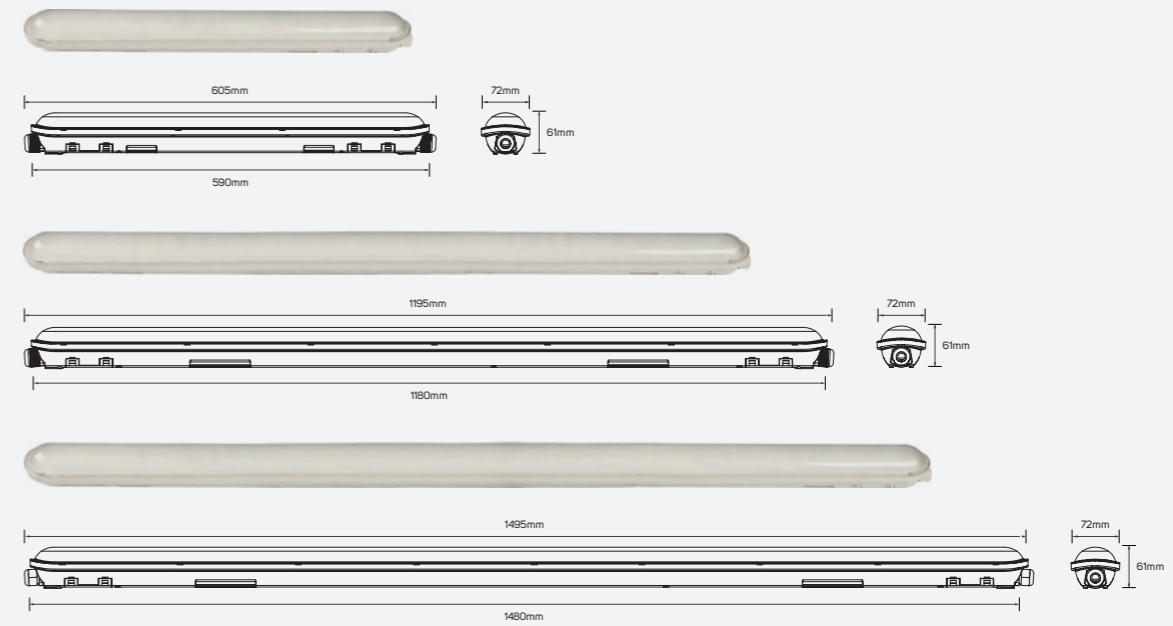


Family Product List

Code No.	Power	CCT	Lumen	Code No.	Power	CCT	Lumen
● 612535	21W	3000K	2490lm	● 612541	55W	3000K	6600lm
● 612536	21W	4000K	2590lm	● 612542	55W	4000K	6700lm
● 612537	21W	6500K	2650lm	● 612543	55W	6500K	6800lm
● 612538	40W	3000K	4800lm				
● 612539	40W	4000K	4900lm				
● 612540	40W	6500K	4980lm				

■ Plastic


IP 65 CRI 80 120°
 AC100-277V 40,000h

LED Waterproof Batten Luminaire

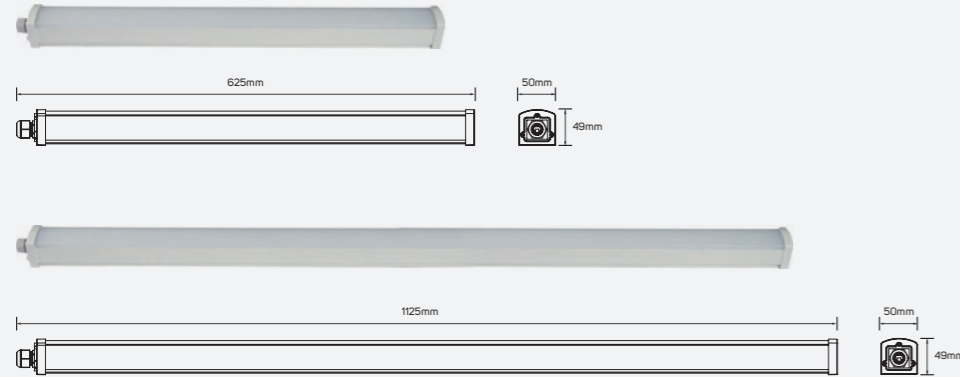

Family Product List


Code No.	Power	CCT	Lumen	Code No.	Power	CCT	Lumen	
611625	18W	3000K	1660lm	611628	36W	3000K	3520lm	⊕ 30,000h ■ Plastic
611626	18W	4000K	1720lm	611629	36W	4000K	3560lm	IP 65 CRI 80 ▲ 120° □ AC220-240V
611627	18W	6500K	1780lm	611630	36W	6500K	3620lm	

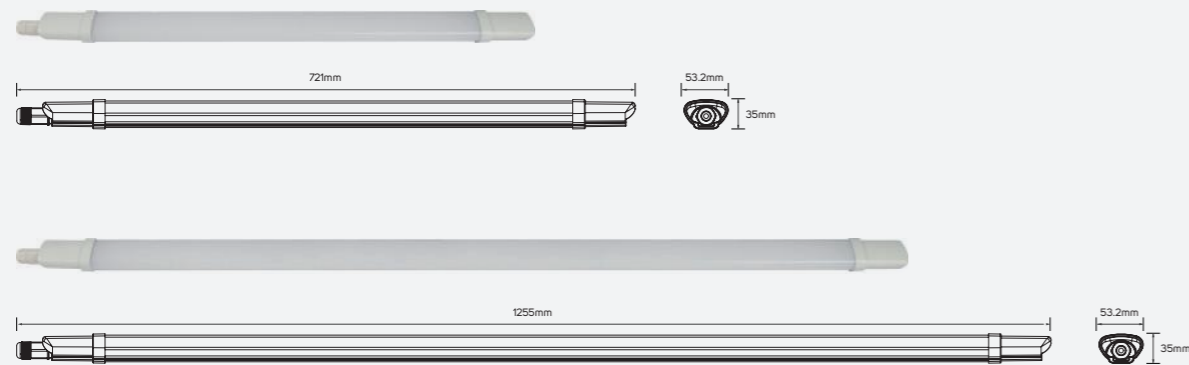

Family Product List


Code No.	Power	CCT	Lumen	Code No.	Power	CCT	Lumen	
611619	18W	3000K	1560lm	611622	36W	3000K	3520lm	■ Plastic IP 65 CRI 80 ▲ 120° □ AC220-240V ⊕ 30,000h
611620	18W	4000K	1680lm	611623	36W	4000K	3560lm	
611621	18W	6500K	1620lm	611624	36W	6500K	3620lm	

Waterproof Batten Luminaire

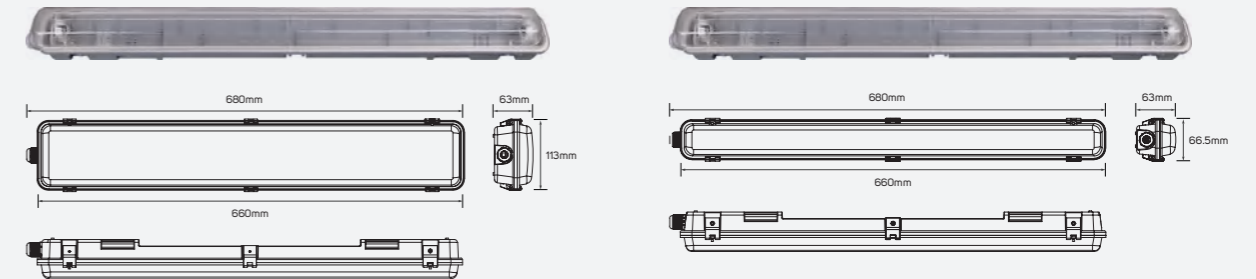

Family Product List


Code No.	
611631	■ ABS+PC Plastic
611632	IP 65 □ AC220-240V

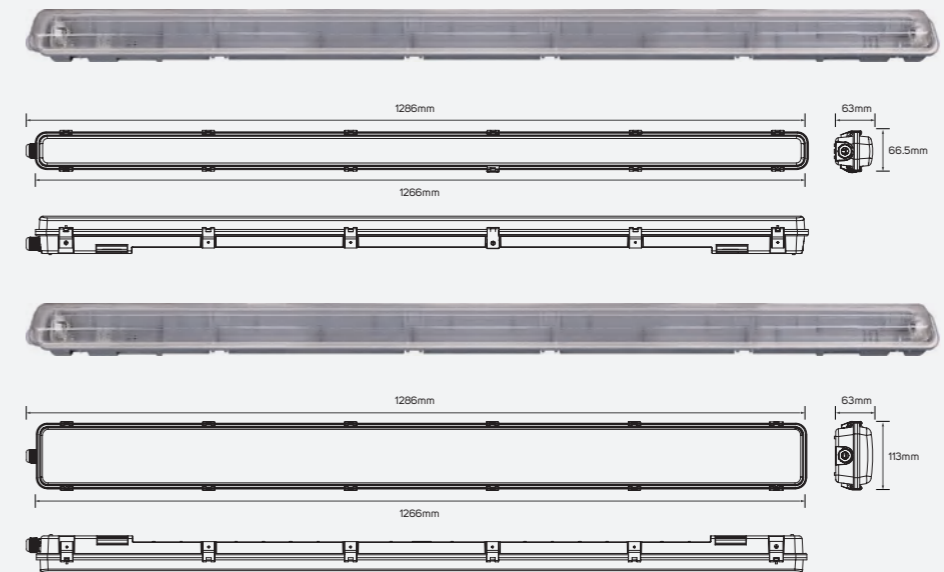

Family Product List

Code No.	
611633	■ ABS+PC Plastic
611634	IP 65 □ AC220-240V


Waterproof Batten Luminaire

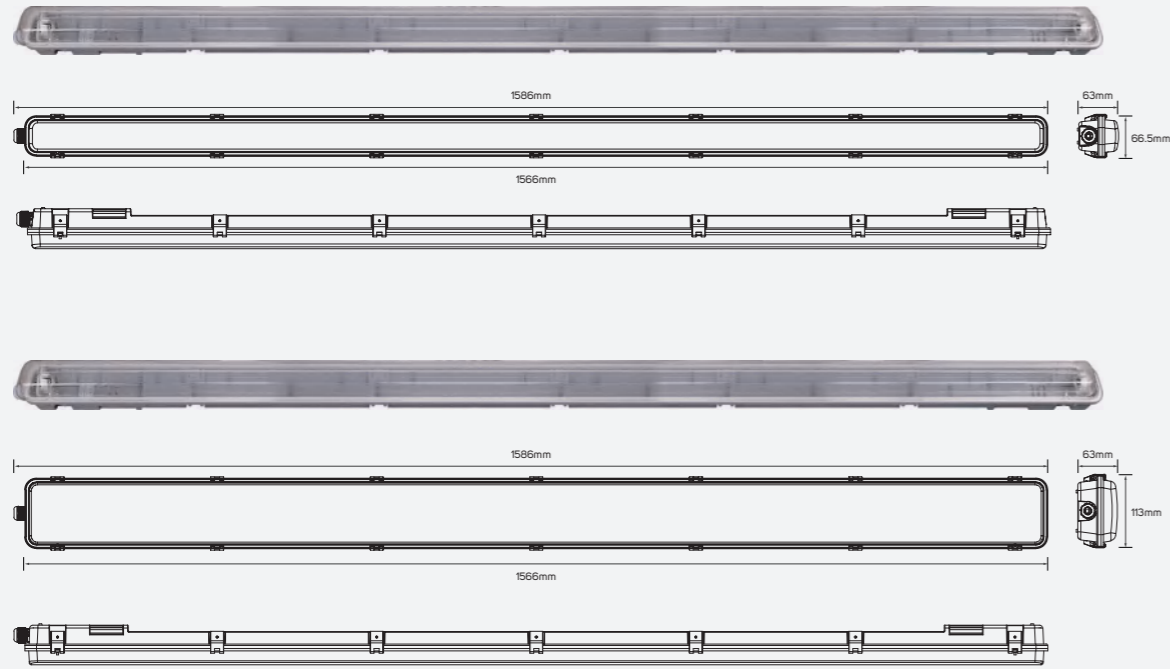


Family Product List

Code No.

- 611635 ■ ABS+PC Plastic
 - 611636
- IP 65**
□ AC220-240V

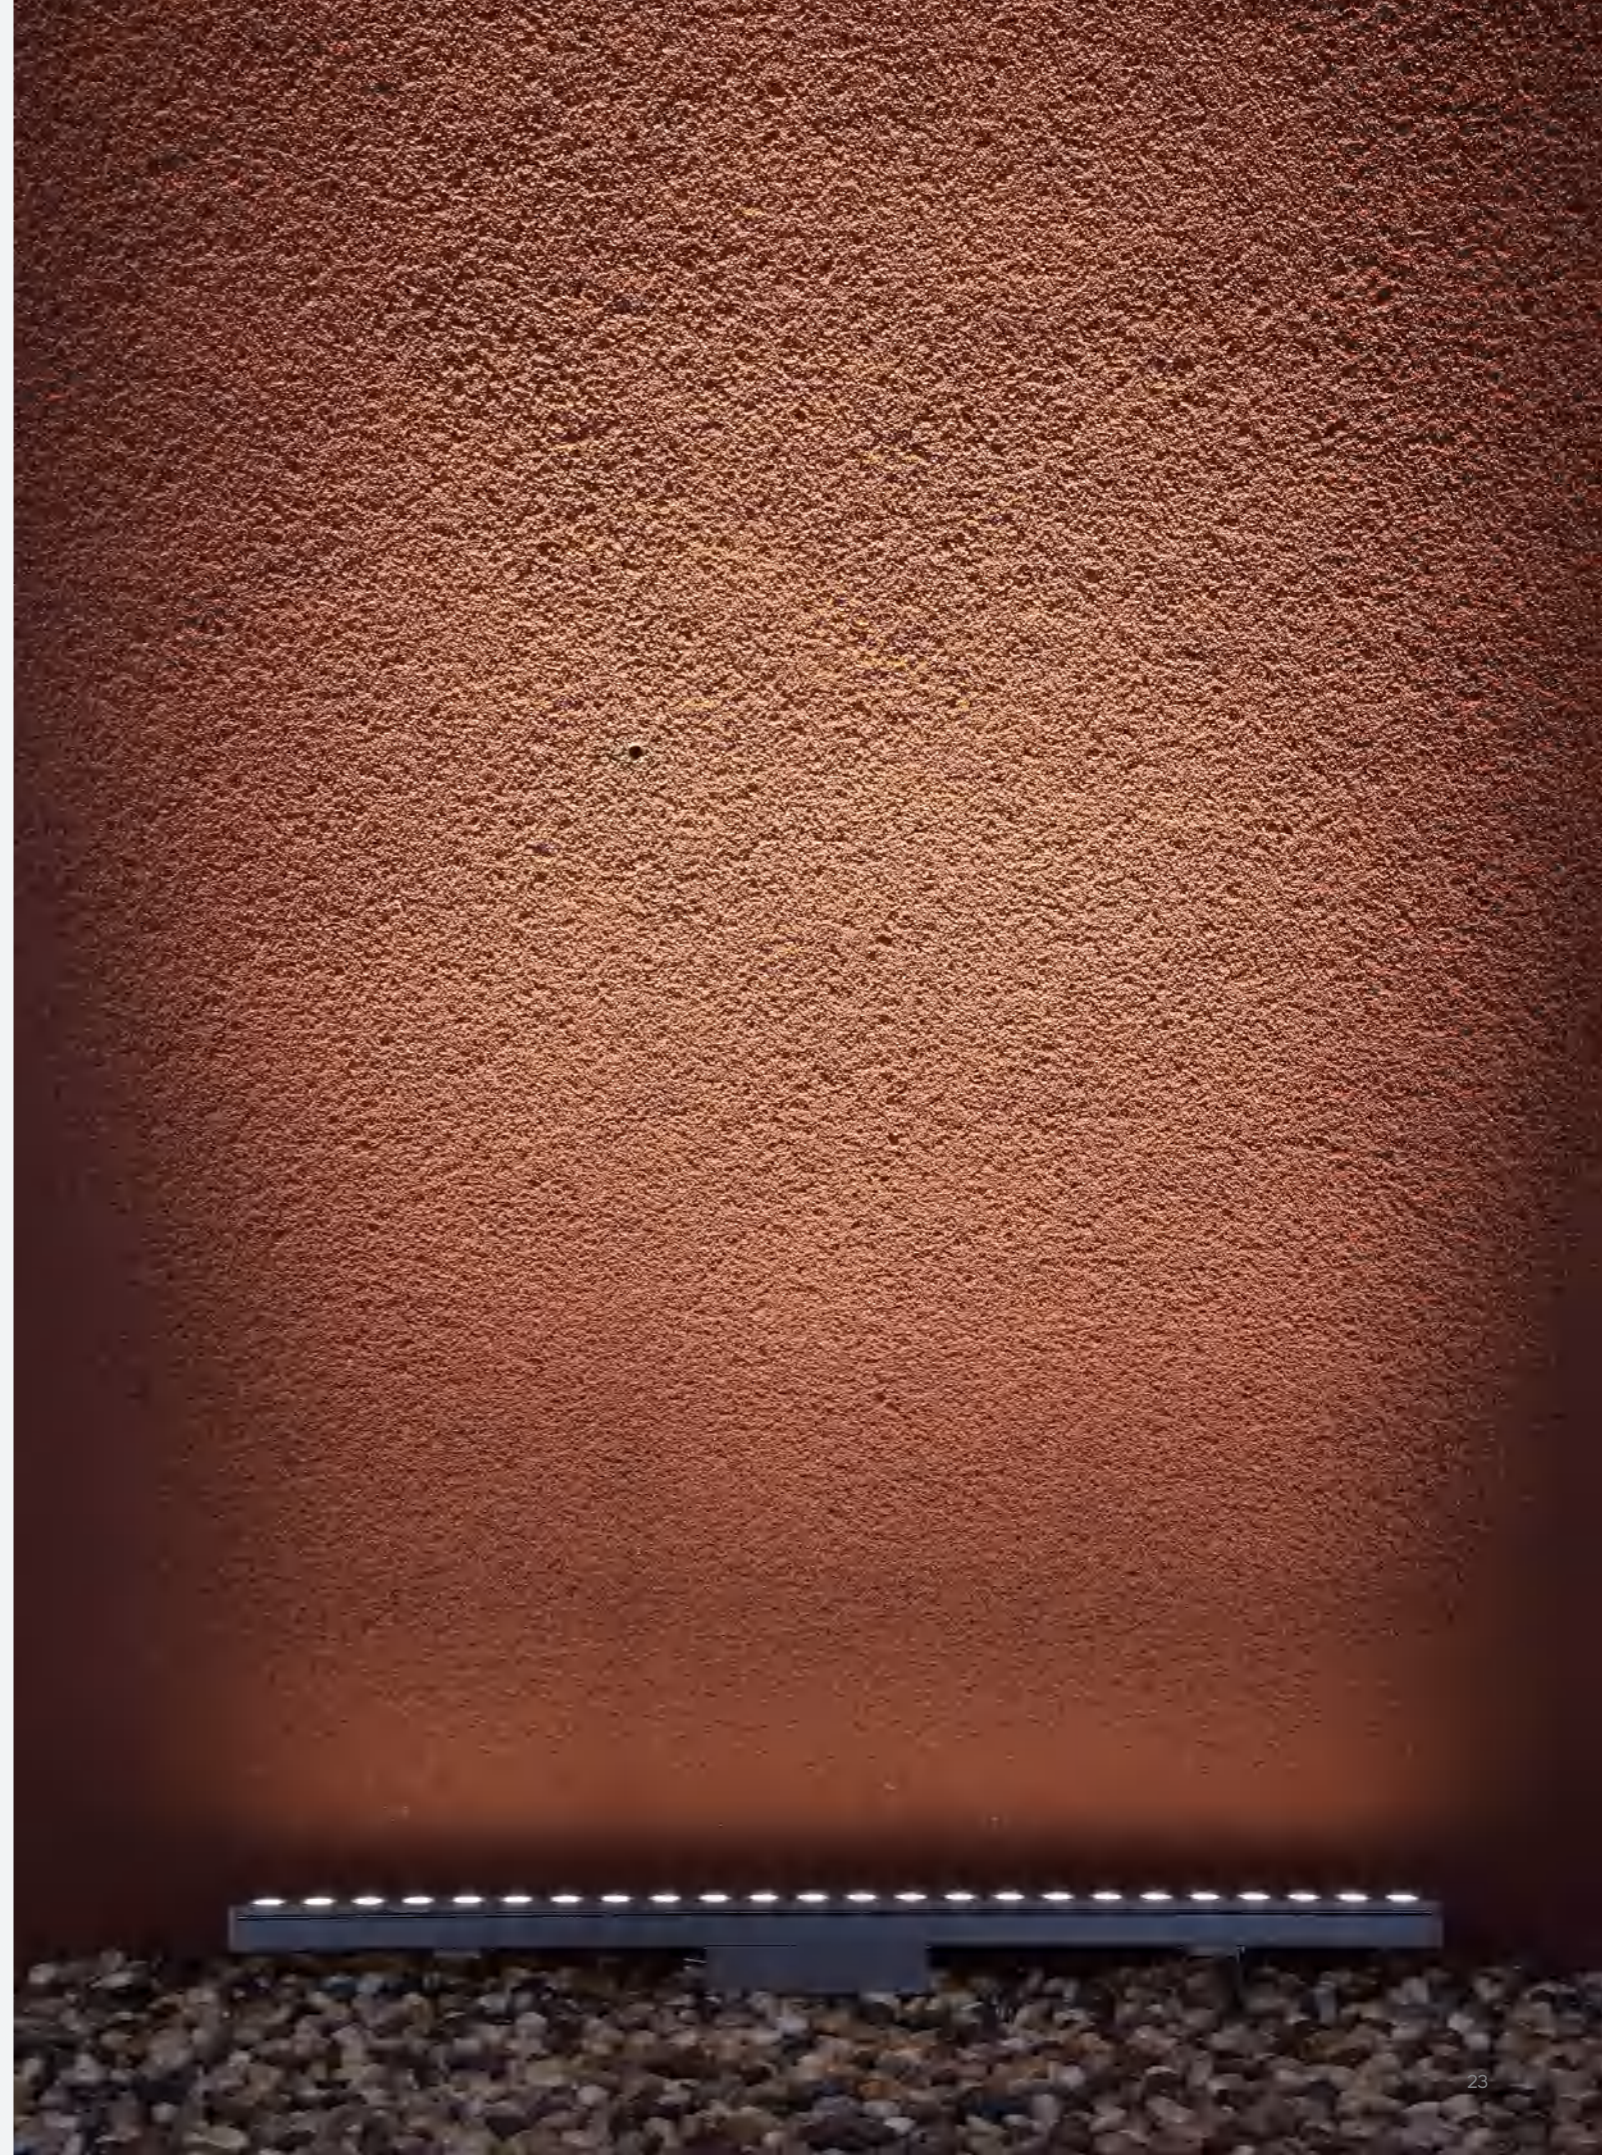

Horizon

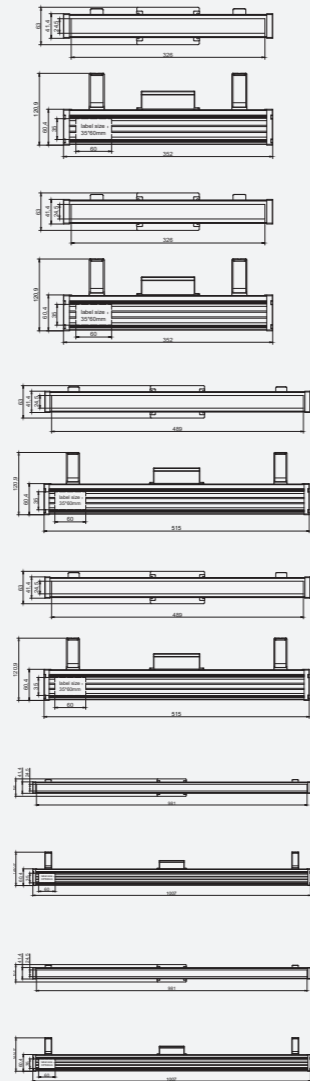


Family Product List

Code No.	Power	CCT	Lumen	Code No.	Power	CCT	Lumen
● LI614582	6W	3000K	390lm	● LI614585	18W	3000K	1150lm
● LI614589	6W	4000K	430lm	● LI614592	18W	4000K	1250lm
● LI614583	9W	3000K	570lm	● LI614586	24W	3000K	1600lm
● LI614590	9W	4000K	630lm	● LI614593	24W	4000K	1750lm
● LI614584	12W	3000K	800lm	● LI614587	36W	3000K	2300lm
● LI614591	12W	4000K	880lm	● LI614594	36W	4000K	2450lm

Aluminum+ Glass
IP 67 CRI 85 15°*24°
 AC220-240V 30,000h

Rosy Dawn

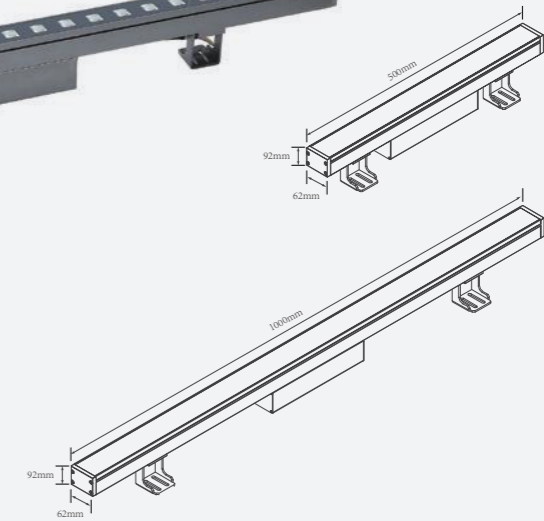

- 612838
- 612837

■ Aluminum

Family Product List



Code No.	Power	CCT	Lumen
● 612833	12W	3000K	800lm
● 612834	18W	3000K	1400lm
● 612835	24W	3000K	1800lm
● 612836	36W	3000K	2800lm

Aluminum
IP 65 CRI 80
 AC220-240V 30,000h

WallGlow


Technical Operating & Electrical Data

IP Rating	IP65
Power	8.5W
Input	DC24V
Life Span	50000hrs

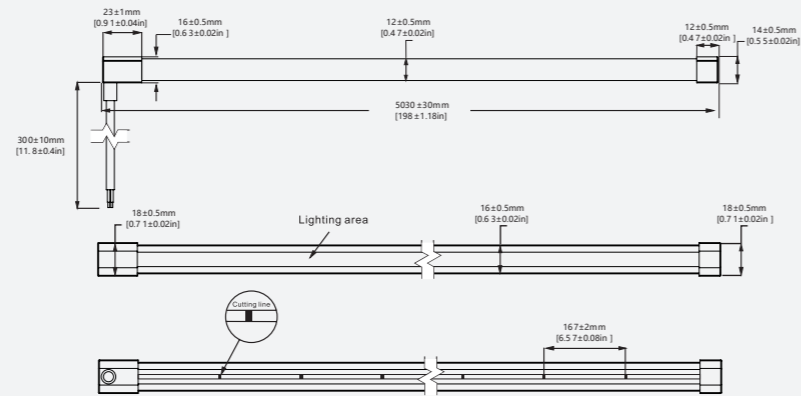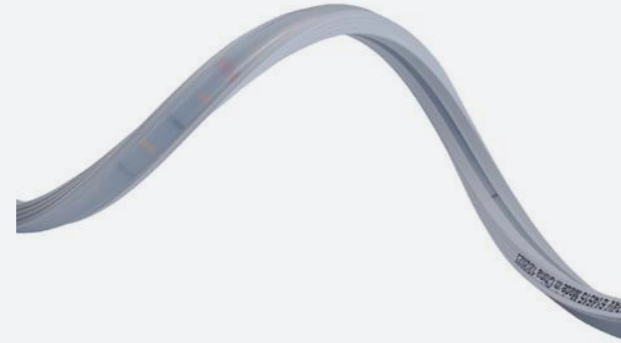


Accessories Specifications

Power Supply




Power Supply

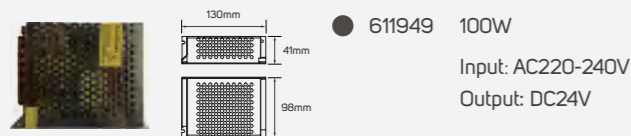


End Cap



Clip



Power Supply

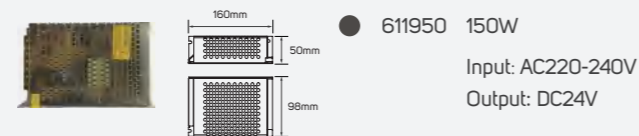

Family Product List


■ Aluminum

Code No.	Power	CCT	Lumen	IP 65	CRI 85	45°	DC24V	50,000h
● 614514	8.5W/0.5M	3000K	700lm/0.5M					
● 614515	8.5W/0.5M	4000K	700lm/0.5M					
● 614516	16W	3000K	1300lm					
● 614517	16W	4000K	1400lm					

WallCascade

Technical Operating & Electrical Data

IP Rating	IP65
Power	18W
Input	DC24V
Life Span	50000hrs

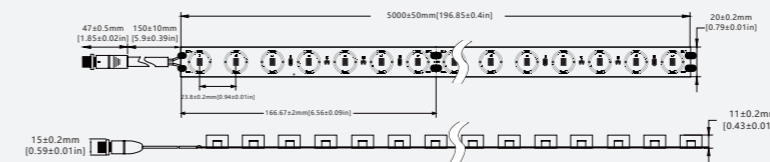

Accessories Specifications

Connector



T Connector




Clip



Profile




Power Supply

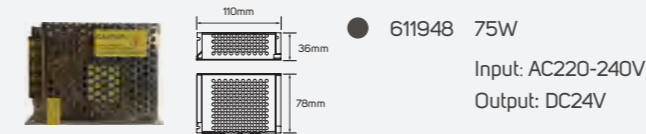


Rotary support



Power Supply

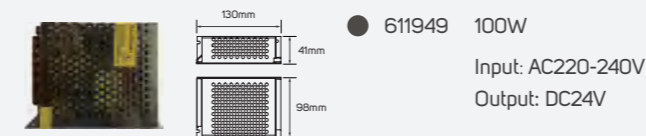

Power Supply

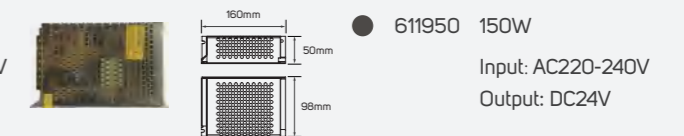

Family Product List

■ Aluminum

Code No.	Power	CCT	Lumen	IP 65	CRI 85	20**30°	DC24V	50,000h
● 614518	18W	3000K	2100lm					
● 614519	18W	4000K	2200lm					
● 614520	18W	3000K	2100lm					
● 614521	18W	4000K	2200lm					





Waterproof Connector

Accessories


Technical Operating & Electrical Data

IP Rating IP68


Areas of Application

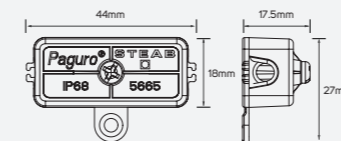


● 211032 IP 68 250V / 6A ■ Inner: 2x0.75mm Outer: 4.8-6mm

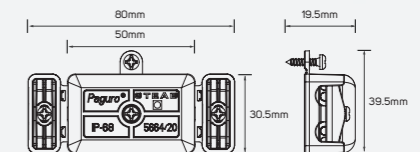

● 211033 IP 68 250V / 6A ■ Inner: 2x1mm Outer: 4.5-8.5mm

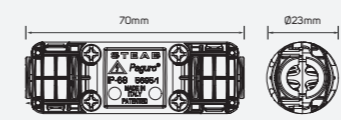

● 211034 ■ Inner: 3x1.5mm Outer: 5.5-10mm
IP 68 250V / 10A

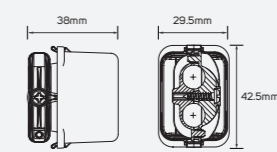



● 211035 ■ Inner: 3x1.5mm Outer: 8-10mm
IP 68 250V / 10A

Accessories


Technical Operating & Electrical Data

Body Material Aluminum
IP Rating IP68


Areas of Application

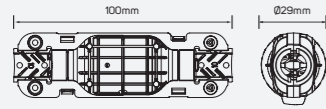


● 211036 ■ Inner: 3x2.5mm
Outer: 6.5-12mm
IP 68 ⚡ 250V / 16A

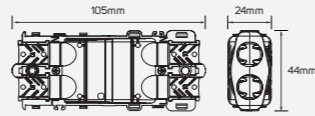

● 211037 ■ Inner: 3x2.5mm
Outer: 6.5-12mm
IP 68 ⚡ 250V / 16A



● 211038 ■ Inner: 3x4mm
Outer: 7.5-16mm
IP 68 ⚡ 450V / 25A

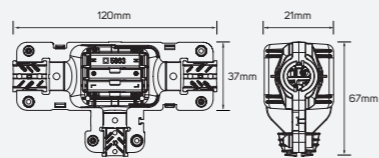



● 211039 ■ Inner main line: 3x6mm Derivation: 3x2.5mm
Outer main line: 7.5-16mm Derivation: 6.5-12mm
IP 68 ⚡ 450V / 25A

Accessories


Technical Operating & Electrical Data

Body Material Aluminum
IP Rating IP68


Areas of Application

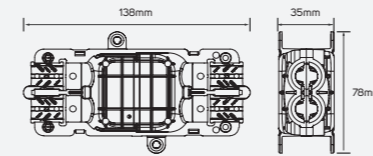


● 211040 ■ Inner: 3x4mm
Outer: 7.5-16mm
IP 68 ⚡ 450V / 25A

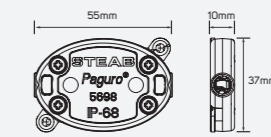

● 211041 ■ Inner: 3x1mm
Outer: 5-7mm
IP 68 ⚡ 250V / 6A

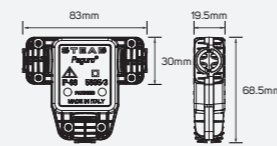

● 211042 ■ Inner main line: 3x2.5mm Derivation: 3x1.5mm
Outer main line: 6.5-12mm Derivation: 5.5-10mm
IP 68 ⚡ 250V / 16A





● 211043 ■ Inner: 3x2.5mm
Outer: 6.5-12mm
IP 68 ⚡ 250V / 16A

Accessories


Technical Operating & Electrical Data

Body Material Aluminum
 IP Rating IP68


Areas of Application



● 613167 ■ 2xM20 (D8-4mm)
 IP 68 □ 450V / 24A

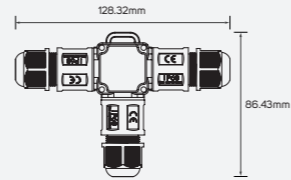

● 613776 ■ 3xM20 (4-8mm/6-11mm) ● 613777
 IP 68 □ 450V / 24A

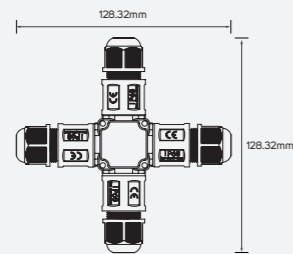



■ 4xM20 (4-8mm/6-11mm)
 IP 68 □ 450V / 24A

Accessories


Technical Operating & Electrical Data

IP Rating IP68


Areas of Application

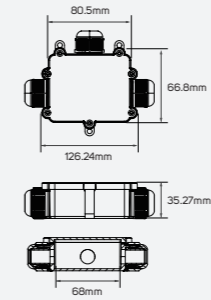


● 614508 ■ PC

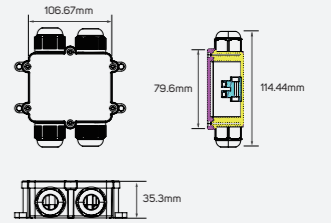


● 614509 ■ PC

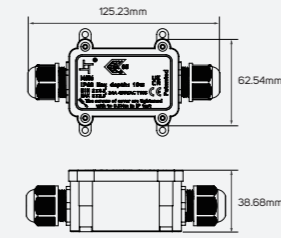


● 614510 ■ PC

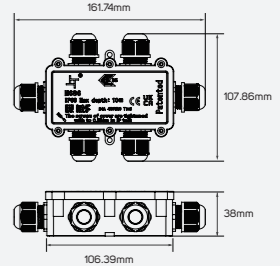

● 614511 ■ PC

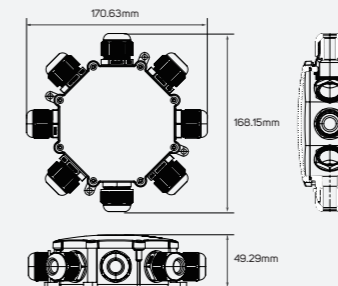

● 614512 ■ PC

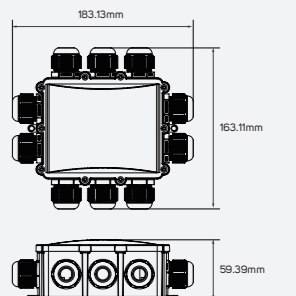

● 614513 ■ PC








Efficient

Technical Operating & Electrical Data

Input Voltage & Frequency AC220-240V, 50/60Hz
 Body Color White

Areas Of Application

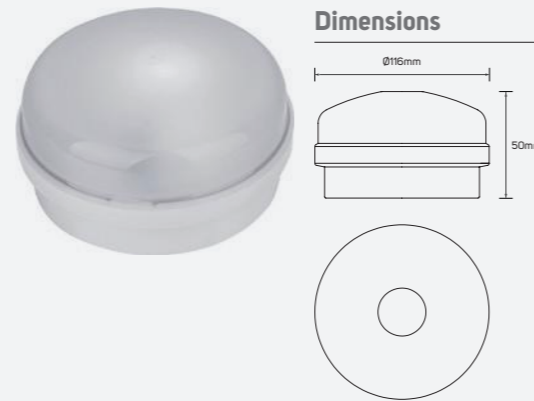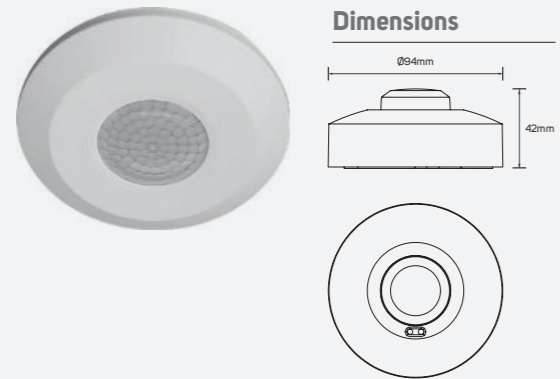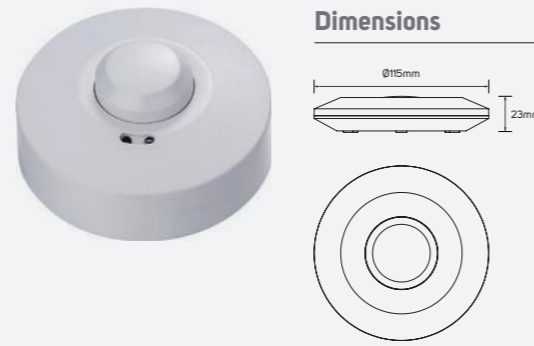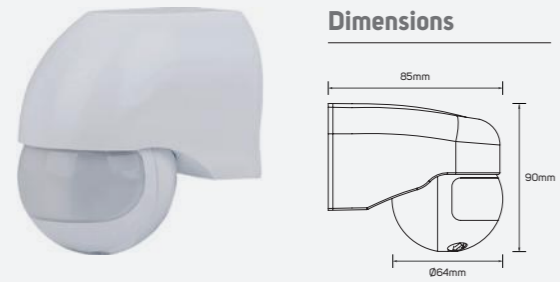

Family Product List






Code No.	Model No.	IP	Max.Watt	Material	Beam Angle	Mounting Type	Detection Distance
612786	ILSSW8P01	44	200W	Polycarbonate	180°	Surface Wall-Mounted PIR Sensor	6~8 meter
612787	ILSS6P01	20	200W	Polycarbonate	360°	Surface-Mounted PIR Sensor	max 6 meter
612788	ILSS10M01	20	300W	Polycarbonate	360°x160°	Surface-Mounted Microwave Sensor	2~10 meter
612789	ILSS10M02	65	300W	Polycarbonate	360°x160°	Surface-Mounted Microwave Sensor	2~10 meter

Efficient

Technical Operating & Electrical Data

Input Voltage & Frequency AC220-240V, 50/60Hz
 Body Color White

Areas Of Application

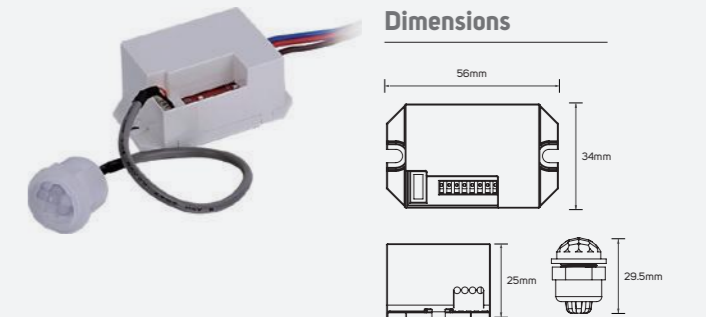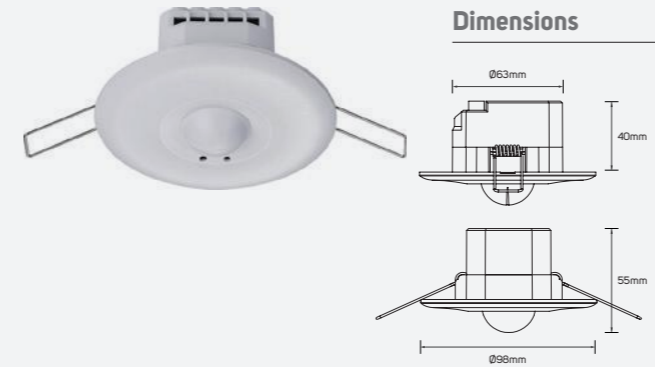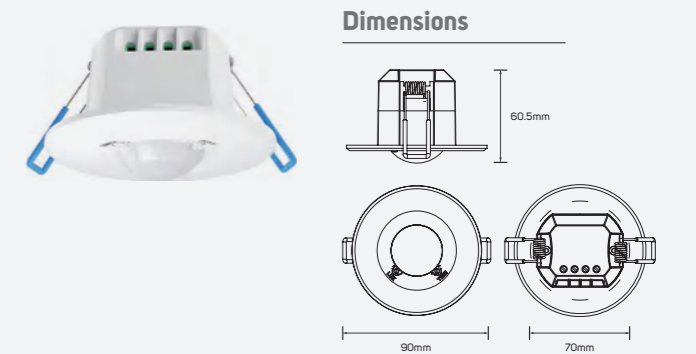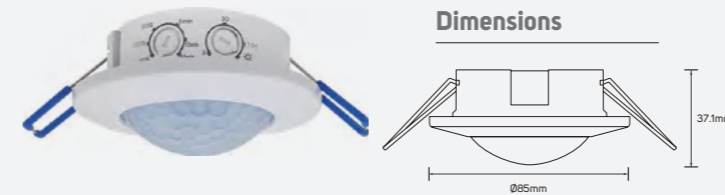

Family Product List

Code No.	Model No.	IP	Max.Watt	Material	Beam Angle	Mounting Type	Detection Distance
612790	ILSSR6P01	20	200W	Polycarbonate	360°	Recessed Ceiling-Mounted PIR Sensor	max 6 meter
612791	ILSSR5P01	20	150W	Polycarbonate	360°	Recessed Ceiling-Mounted PIR Sensor	3x5 meter
612792	ILSSR10M01	20	300W	Polycarbonate	360°x160°	Recessed Ceiling-Mounted Microwave Sensor	2~10 meter
612793	ILSSU6P01	20	200W	ABS	100°	Motion Sensor	<6 meter



LED Emergency Light

Emergency light



● 612521


Accessories Specifications

Legend Board



● 612522

■ Plastic

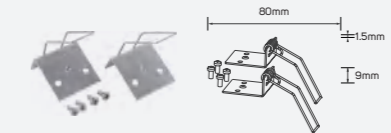

● 612526

■ Metal

Family Product List

■ Plastic

IP 65


CRI 80

AC220-240V

⌚ 50,000h

Code No.	Power	CCT	Lumen
● 612521	4.5W	5700K-6500K	120lm
● 612523			
● 612524			
● 612525			

Emergency light

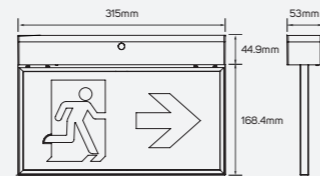

● 612527

Recessed Mounting Accessory



○ 612532

■ Plastic


Family Product List

■ Plastic IP 20 CRI 80 AC220-240V 50,000h

Code No.	Power	CCT	Lumen
● 612527	3W	5700K-6500K	75lm
● 612528			
● 612529			
● 612530			
● 612531			



Summer

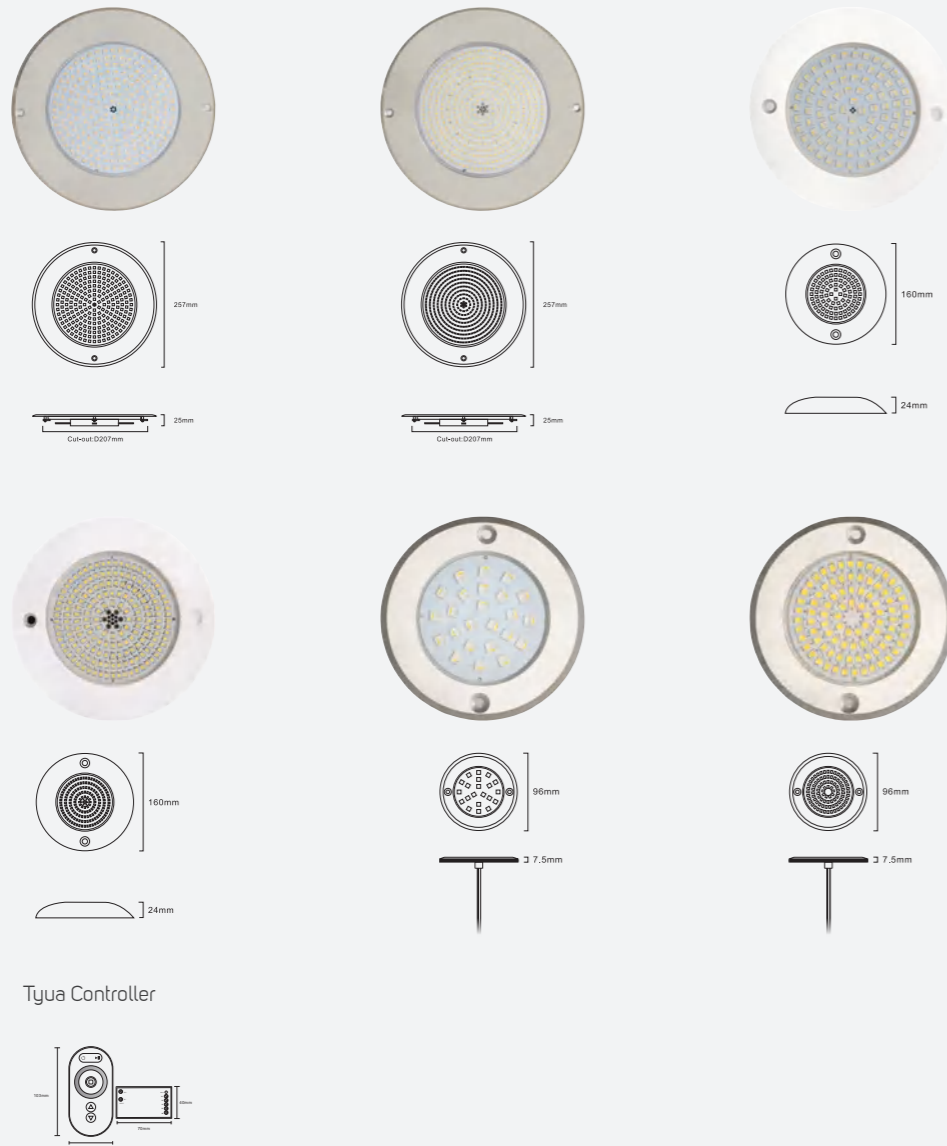

Family Product List


CRI 85 120° 50,000h

Code No.	Model No.	Watt	Lumen	CCT	IP	Voltage	Material
LI614914	ILS36WSPOLRGBW01	36W	1800	RGBW(5000K)	68	DC12V	Stainless Steel
LI614915	ILS36WSPOL850DL01	36W	3300	Day White 5000K	68	AC/DC12V 50/60Hz	Stainless Steel
LI614916	ILS15WSPOLRGBW01	15W	750	RGBW(5000k)	68	DC12V	PC
LI614917	ILS15WSPOL850DL01	15W	1500	Day White 5000K	68	AC/DC12V 50/60Hz	PC
LI614918	ILS10WSPOLRGBW01	10W	450	RGBW(5000k)	68	DC12V	Stainless Steel
LI614919	ILS10WSPOL850DL01	10W	900	Day White 5000K	68	AC/DC12V 50/60Hz	Stainless Steel
LI614920	ILSDMXRC02	144W		N/A	20	DC12V	PC

Summer



Accessories Specifications

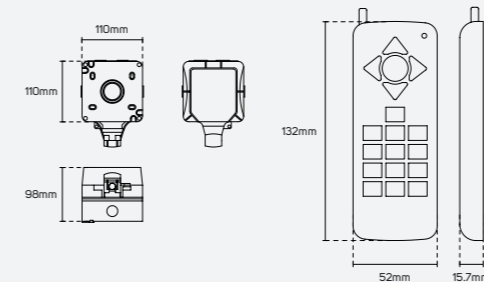


○ 614904 (RGBW)

Family Product List


Glass IP 68 CRI 85 100° 50,000h

Code No.	Model No.	Watt	Lumen	CCT	Voltage
614877	ILS18WSPOL830WW01	18W	2000lm	3000K	AC/DC12V
614878	ILS18WSPOL850DL01	18W	2100lm	5000K	AC/DC12V
614879	ILS18WSPOLRGBWL01	18W	2200lm	RGBW. W=5000K	AC12
614880	ILS30WSPOL830WW01	30W	3300lm	3000K	AC/DC12V
614881	ILS30WSPOL850DL01	30W	3500lm	5000K	AC/DC12V
614882	ILS28WSPOLRGBWL01	28W	3200lm	RGBW. W=5000K	AC12V


Summer

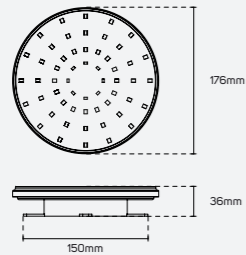


Accessories Specifications

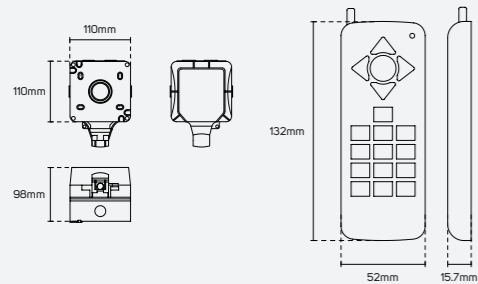

○ 614904

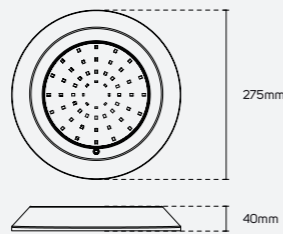

○ 614889 - 614890

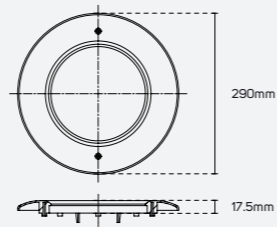



○ 614891

Family Product List


■ PC IP 68 CRI 85 110° 50,000h

Code No.	Model No.	Watt	Lumen	CCT	Voltage
○ 614883	ILS18WSPOL830WW02	18W	2000lm	3000K	AC/DC12V
○ 614884	ILS18WSPOL850DL02	18W	2050lm	5000K	AC/DC12V
○ 614885	ILS18WSPOLRGBWL02	18W	2100lm	RGBW. W=5000K	AC12V
○ 614886	ILS30WSPOL830WW02	30W	3150lm	3000K	AC/DC12V
○ 614887	ILS30WSPOL850DL02	30W	3300lm	5000K	AC/DC12V
○ 614888	ILS28WSPOLRGBWL02	28W	3200lm	RGBW. W=5000K	AC12V

Summer

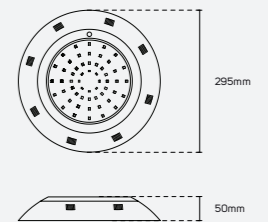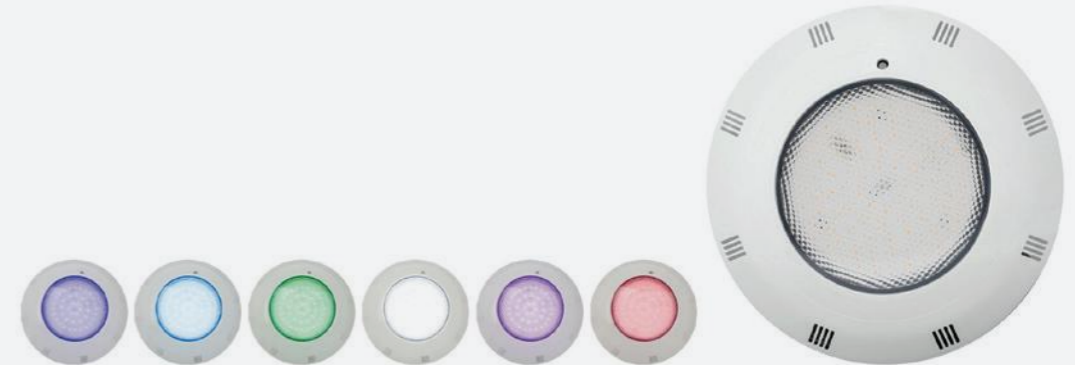

Accessories Specifications

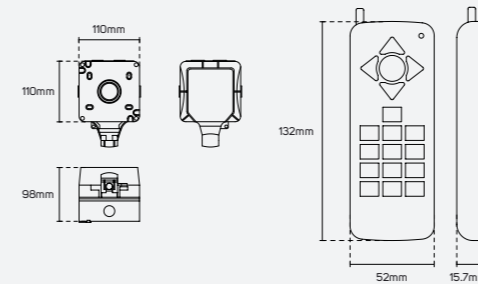


○ 614904 (RGBW)

Family Product List


■ PC IP 68 CRI 85 100° 50,000h

Code No.	Model No.	Watt	Lumen	CCT	Voltage
○ 614892	ILS18WSPOL830WW03	18W	1900lm	3000K	AC/DC12V
○ 614893	ILS18WSPOL850DL03	18W	1950lm	5000K	AC/DC12V
○ 614894	ILS18WSPOLRGBWL03	18W	2000lm	RGBW. W=5000K	AC12V
○ 614895	ILS30WSPOL830WW03	30W	3100lm	3000K	AC/DC12V
○ 614896	ILS30WSPOL850DL03	30W	3200lm	5000K	AC/DC12V
○ 614897	ILS28WSPOLRGBWL03	28W	2850lm	RGBW. W=5000K	AC12V

Swing

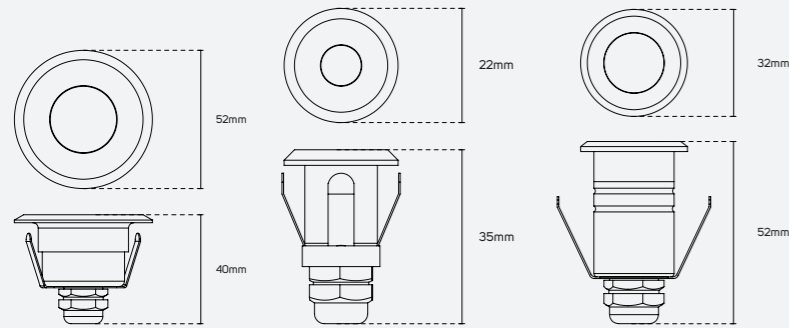

Accessories Specifications

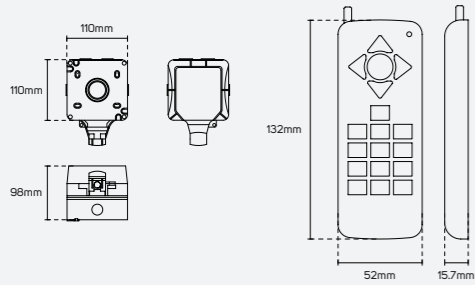

○ 614904 (RGBW)

Family Product List

■ Stainless Steel IP 68 CRI 80 DC12V 50,000h

Code No.	Model No.	Watt	Lumen	CCT	Beam Angle
○ 614898	ILS2WMISPOL830WW01	2W	180lm	3000K	30°
○ 614899	ILS2WMISPOL850DL01	2W	190lm	5000K	30°
○ 614900	ILS05WMISPOL830WW01	0.5W	13lm	3000K	60°
○ 614901	ILS05WMISPOL850DL01	0.5W	14lm	5000K	60°
○ 614902	ILS1WMISPOL830WW02	1W	80lm	3000K	24°
○ 614903	ILS1WMISPOL850DL02	1W	85lm	5000K	24°



Contact Us

global@illuslighting.com

www.illuslighting.com

Find us in KSA,UAE, Oman, Kuwait, Qatar, Egypt, Spain, China.